

HWD-6100MH-G3 SERIES TURBO HD DVR

Key Feature

- H.265 Pro+/H.265 Pro/H.265 video compression
- HDTV/AVHD/CVI/AVBS/IP video input
- Audio via coaxial cable
- Up to 6/12/24-ch IP camera inputs (up to 6 MP)
- Max. 800 m for 1080p and 1200 m for 720p HDTV signal
- Up to 10 TB capacity per HDD



Compression and Recording

- H.265 Pro+ improves encoding efficiency and reduces the data storage cost
- Full channel recording at up to 4 MP lite resolution

Storage and Playback

- Smart search for efficient playback
- Support the third party cloud storage

Network & Ethernet Access

- Hik-Connect & DDNS (Dynamic Domain Name System) for easy network management
- Max. 8/16/32 Mbps incoming bandwidth, 72/96/128 Mbps total bandwidth




Specification

Model	HWD-6104MH-G3	HWD-6108MH-G3	HWD-6116MH-G3
Recording			
Video compression	H.265 Pro+/H.265 Pro/H.265/H.264+/H.264		
Encoding resolution	When 4 MP Lite mode not enabled: 4 MP/4 MP Lite/1080p/720p/WD1/4CIF/VGA/CIF; When 4 MP Lite mode enabled: 4 MP Lite/1080p Lite/720p Lite/WD1/4CIF/VGA/CIF When 1080p Lite mode is not enabled: 4 MP/1080p/720p/WD1/4CIF/VGA/CIF ; When 1080p Lite mode is enabled: 4 MP/1080p Lite/720p Lite/WD1/4CIF/VGA/CIF		
Frame rate	Main stream: For 720p stream access: 720p/VGA/WD1/4CIF/CIF@25 fps (P)/30 fps (N) When 4 MP Lite mode not enable: For 4 MP stream access: 4 MP@8 fps; 4 MP lite/1080p/720p/WD1/4CIF/VGA/CIF@15 fps (N) When 4MP Lite mode enabled: For 4 MP stream access: 4 MP lite@15 fps; 1080p Lite/720p Lite/VGA/WD1/4CIF/CIF@25 fps (P)/30 fps (N) When 1080p Lite mode not enabled: For 1080p stream access: 1080p/720p@15 fps; VGA/WD1/4CIF/CIF@25 fps (P)/30 fps (N) When 1080p Lite mode enabled: For 1080p stream access: 1080p lite/720p lite/VGA/WD1/4CIF/CIF@25 fps (P)/30 fps (N) Sub-stream: WD1/4CIF/2CIF@12 fps; CIF/QVGA/QCIF@25 fps (P)/30 fps (N)		
Video bit rate	32 Kbps to 6 Mbps		
Dual stream	Support		
Stream type	Video, Video & Audio		
Audio compression	G.711u		
Audio bit rate	64 Kbps		
Video and Audio			
IP video input	2-ch (up to 6-ch)	4-ch (up to 12-ch)	8-ch (up to 24-ch)
	Up to 6 MP resolution		
	Support H.265+/H.265/H.264+/H.264 IP cameras		
Analog video input	4-ch	8-ch	16-ch
	BNC interface (1.0 Vp-p, 75 Ω), supporting coaxitron connection		
HDTVI input	4 MP, 1080p25, 1080p30, 720p25, 720p30		
AHD input	4 MP, 1080p25, 1080p30, 720p25, 720p30		
HDCVI input	4 MP, 1080p25, 1080p30, 720p25, 720p30		
CVBS input	Support		
VGA output	1-ch, 1920 × 1080/60 Hz, 1280 × 1024/60 Hz, 1280 × 720/60 Hz, 1024 × 768/60 Hz		
HDMI output	1-ch, 1920 × 1080/60 Hz, 1280 × 1024/60 Hz, 1280 ×		1-ch, 4K (3840 ×

	720/60 Hz, 1024 × 768/60 Hz	2160)/30 Hz, 2K (2560 × 1440)/60 Hz, 1920 × 1080/60 Hz, 1280 × 1024/60 Hz, 1280 × 720/60 Hz, 1024 × 768/60 Hz	
Audio input	1-ch, RCA (2.0 Vp-p, 1 KΩ)		
	4-ch via coaxial cable	8-ch via coaxial cable	16-ch via coaxial cable
Audio output	1-ch, RCA (Linear, 1 KΩ)		
Two-way audio	1-ch, RCA (2.0 Vp-p, 1 KΩ) (using the audio input)		
Synchronous playback	4-ch	8-ch	16-ch
Network			
Remote connection	32	64-ch	128-ch
Network protocol	TCP/IP, PPPoE, DHCP, Hik-Connect, DNS, DDNS, NTP, SADP, SMTP, NFS, iSCSI, UPnP™, HTTPS, ONVIF		
Network interface	1, RJ45 10/100 Mbps self-adaptive Ethernet interface		1, RJ45 10/100/1000 Mbps self-adaptive Ethernet interface
Auxiliary interface			
SATA	1 SATA interface		
Capacity	Up to 10 TB capacity for each disk		
USB interface	Real panel: 2 × USB 2.0		
Alarm in/out	N/A		
General			
Power supply	12 VDC, 1.5 A	12 VDC, 1.33 A	12 VDC, 2.17 A
Consumption (without HDD)	≤ 8 W	≤ 12 W	≤ 20 W
Working temperature	-10 °C to 55 °C (14 °F to 131 °F)		
Working humidity	10% to 90%		
Dimension (W × D × H)	260 × 222 × 45 mm (10.2 × 8.7 × 1.8 inch)		
Weight (without HDD)	≤ 0.8 kg (1.8 lb.)		≤ 1.2 kg (2.6 lb.)

Physical Interface

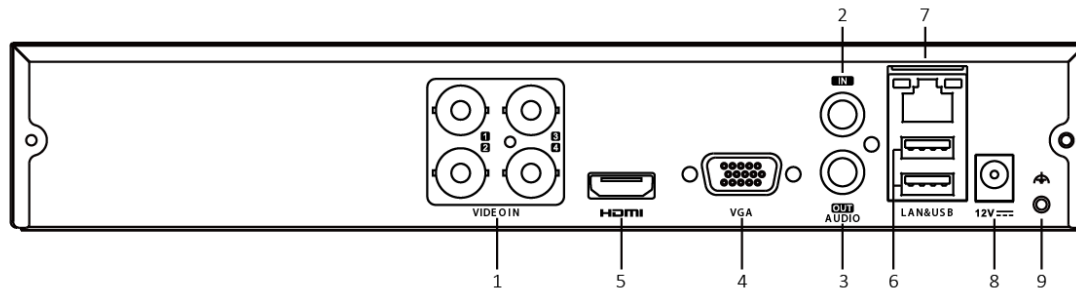

*: The rear panel of HWD-6108MH-G3 and HWD-6116MH-G3 provide 8 and 16 video input interfaces.

Index	Description	Index	Description
1	Video and Audio in	6	USB Interface
2	AUDIO IN	7	Network Interface
3	AUDIO OUT	8	Power Supply
4	VGA	9	GND
5	HDMI		

Available Model

HWD-6104MH-G3, HWD-6108MH-G3, HWD-6116MH-G3

Distributed by



HIKVISION[®]
HiWatch Series

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Europe
T +31-23-55-42-770
info.eu@hikvision.com

Hikvision Middle East
T +971-4-8816086
salesme@hikvision.com

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision France
T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Poland
T +48-22-460-01-50
poland@hikvision.com

Hikvision UK
T +01628-902140
support.uk@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Oceania
T +61-2-8599-4233
salesau@hikvision.com

Hikvision Canada
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Korea
T +82-31-731-8841
sales.korea@hikvision.com

Hikvision Brazil
T +55 11 3318-0050
Latam.support@hikvision.com

Hikvision Africa
T +27 (10) 0351172
sale.africa@hikvision.com

Hikvision Hong Kong
T +852-2151-1761